

TPE sealing strip DF 2003

Product information sheet

The TPE sealing strip for windows and doors meets the highest of standards for sealing, year after year. When closing standard windows and doors, the sealing strip is designed to slide into place without obstruction to create a perfect seal.

Application


The TPE sealing strip is used as the primary seal in windows and doors between casement and frame.

Material

The TPE sealing strip combines a rigid TPE spine with a fixed extruded foam TPE sealing lip with a smooth, durable surface that is impervious to stains.

Benefits

- The foam TPE sealing strip ensures a consistently high elasticity
- Impervious to all types of paint
- The soft sealing lip ensures low closing pressure
- Weatherproof
- No shrinkage or expansion as a result of ageing or fluctuating temperatures
- Long service life
- The corners are neither welded nor glued, but merely mitred with special tongs.
- Easy to fit to windows even with wooden grooves

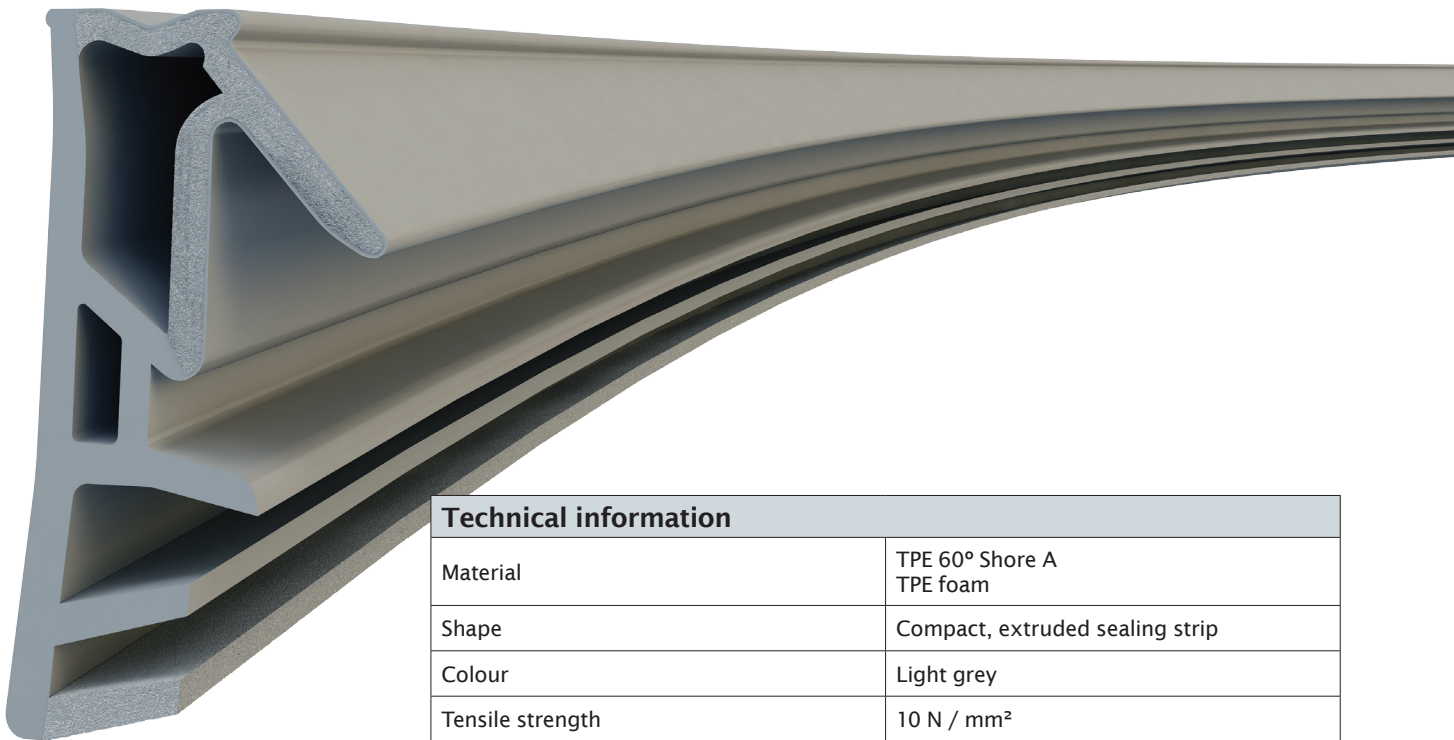

Technical information	
Material	TPE 60° Shore A TPE foam
Shape	Compact, extruded sealing strip
Colour	Light grey
Tensile strength	10 N / mm ²
Elongation upon failure	600 %
Delivery format	200 per box, 1,600 per pallet
Permanent deformation	DIN ISO 815 By 72h / +23 °C = 16% By 72h / +70 °C = 28%